

Cable Specification

KASPER CABLE		SPECIFICATION	
Cable name	K-SUB		
Model No.	K-SUB/300		
Specification	[(20/0.15OFC+PE)*2C+Cotton Yarn+AL+B16/8/0.10BC+PVC]*1C OD:6.5mm Matt Red		
LENGTH	300Meters/Minimum	Qty/Carton	1 Spool
SPOOL SIZE	P-400*170*160*12 mm	Net Weight	19.3 Kgs
SPOOL STICKER	Yes	Gross Weight	20.1 Kgs
In wall	Yes	Measure	1.33'


MANUFACTURE STANDARD

Item	Description/Color	Material	Thickness	Outer Diameter	Shape
Conductor	20/0.15	OFC		0.77mm±0.1	
Inner Jacket	Red/Blue	PE	0.31mm±0.1	1.4mm±0.1	Round
Filler	Cotton Yarn				
Shield	AL	PVC	0.04mm±0.1	2.95mm±0.1	
Braiding	B16/8/0.10	OFC	0.40mm±0.1	3.35mm±0.1	
Jacket	Matt Red	PVC	1.57mm±0.1	6.5mm±0.1	Round
Printing	Yes.				

Printing text >>> KASPER • K-SUB • HIGH DEFINITION 22AWG PURE OFC SUBWOOFER CABLE >>>

Computer jet printing 00m || 00m~ 299m || 299m

Drawing

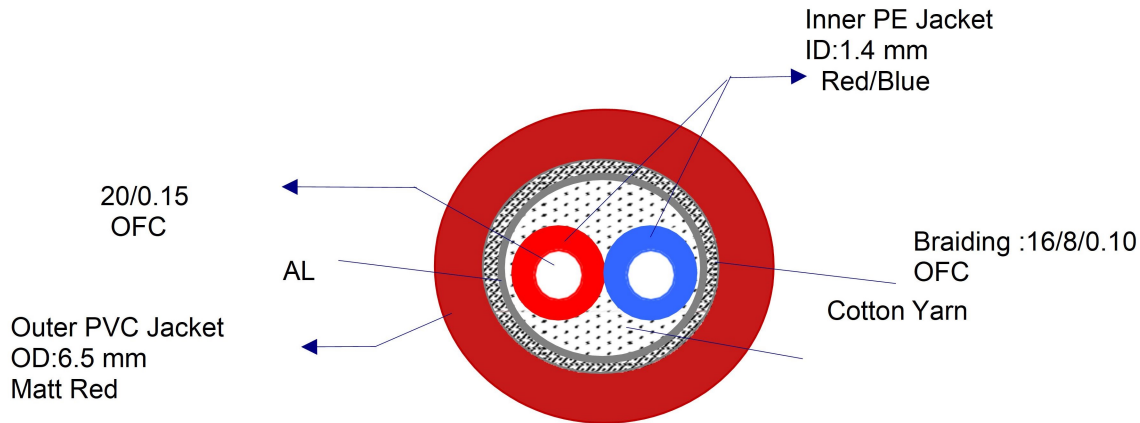

CHARACTERISTICS

Test Report:

***Conductor Resistance**

0.05670 Ω/M


***Capacitance**

65.94 PF/M () 121.88 PF/M (Red) 122.556 PF/M (Blue)

***Inductance**

1.3713 μH/M

Cable picture

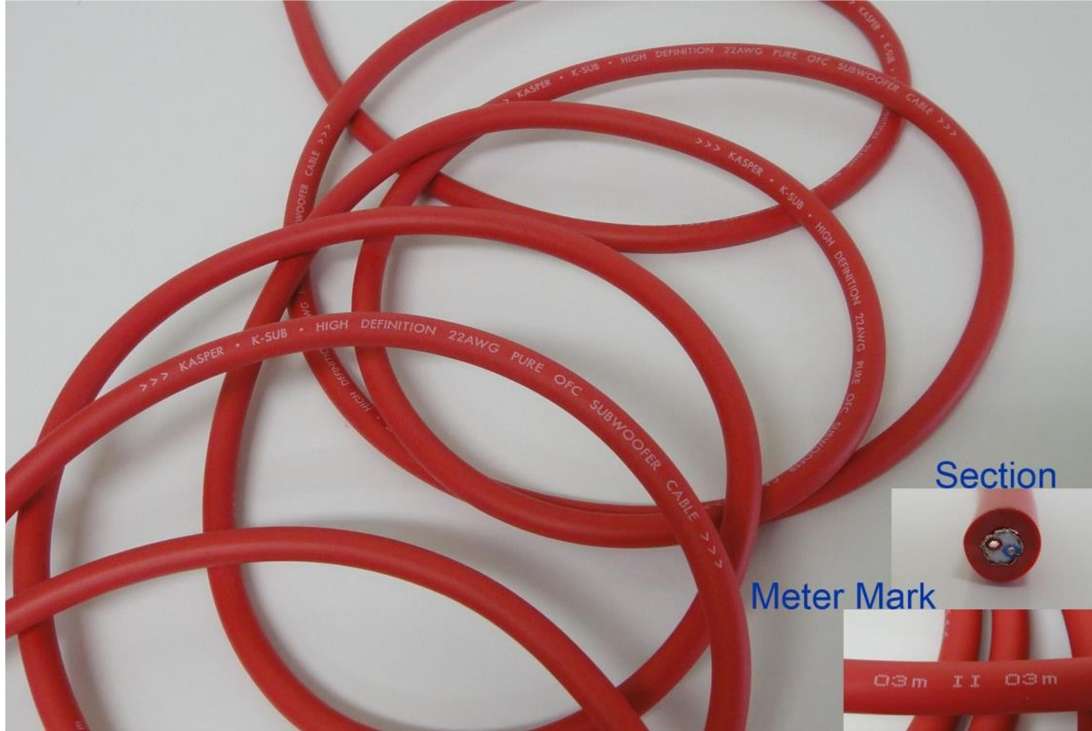

Made by: Kelly Lin

Date issue: 31-July-2018

Approved by: Maxine Wu

Sheet: 1/1

Version: A1