


# Cable Specification

| KASPER CABLE  |   | SPECIFICATION |          |
|---------------|---|---------------|----------|
| Cable name    | 1.5mm <sup>2</sup> /15AWG speaker cable         |               |          |
| Model No.     | KSC-15/300                                      |               |          |
| Specification | (7/20/0.115OFC+PVC)*2F OD: 3.2*6.4mm Matt White |               |          |
| LENGTH        | 300Meters/Minimum                               | Q'ty/Carton   | 9 Spools |
| SPOOL SIZE    | PK-300*150*160                                  | Net Weight    | 15.3 Kgs |
| SPOOL STICKER | YES   | Gross Weight  | 15.9 Kgs |
| In wall       | YES   | Measure       | 0.66'    |

### MANUFACTURE STANDARD

| Item                  | Description/Color  | Material | Thickness  | Outer Diameter | Shape                 |
|-----------------------|--|----------|------------|----------------|-----------------------|
| Conductor             | 7/20/0.115   | OFC      |            | 1.78mm±0.1     |                       |
| Jacket                | Matt white   | PVC      | 0.71mm±0.1 | 3.2*6.4mm±0.1  | Parallel Round/Square |
| Printing              | Yes.   |          |            |                |                       |
| Printing text         | KASPER - 1.5mm <sup>2</sup> / 15AWG HIGH DEFINITION SPEAKER CABLE - HIGH PURITY OXYGEN FREE COPPER |          |            |                |                       |
|                       | > > > +  |          | >>>+       |                |                       |
| Computer jet printing | 00m    00m~299m    299m  |          |            |                |                       |

### Drawing

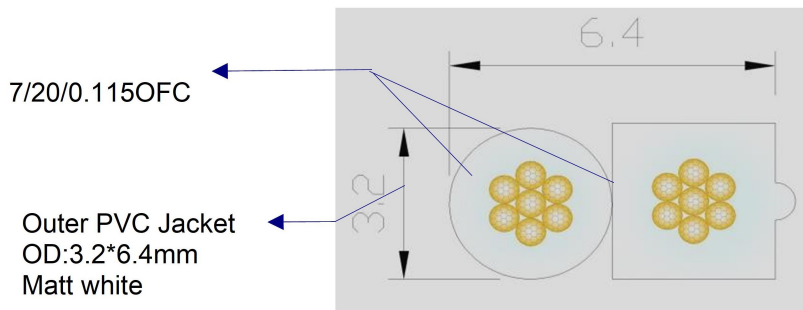

### CHARACTERISTICS

Test Report:

**\*Conductor Resistance**

0.01335Ω/M

**\*Capacitance**

61.91 PF/M

**\*Inductance**

1.2853 μH/M

**Cable Picture :**



