




K-LOUT
SERIES

kasper

Klout-312

Indoor Point Source Passive Speaker for
Installs and Home Theatres. Available in
Black& White color options

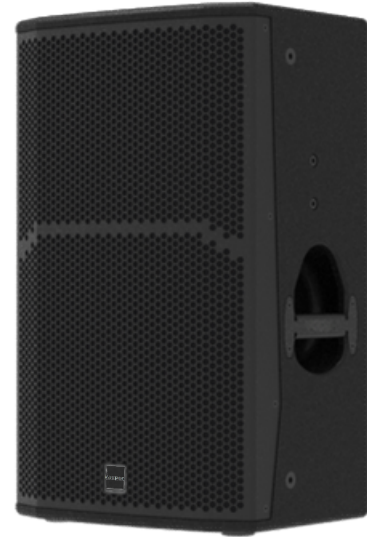

TECHNICAL DATA

Speaker Type	Single 12" Full Range Speaker
--------------	-------------------------------

ACOUSTICAL DATA

Frequency Response	55-20,000 Hz
Impedance	8Ω
Watts	300 RMS Watts / 600 Watts Peak Power
Min SPL	98 dB
HF	0.75" compression driver
Voice Coil	1"
Directivity	100° x 60°
LF	12" x 1
Voice Coil	1.7" neodymium driver
Crossover Point	1.2KHz

CONNECTIVITY

Input	2 x NL4
-------	---------

MECHANICS

Housing	MDF, Polyurea Painted
Dimensions (W x H x D)	380 mm x 595 mm x 370 mm
Net weight	26 kg