


# Cable Specification

KASPER CABLE		SPECIFICATION	
Cable name	<b>KIC-16</b>		
Model No.	<b>KIC-16</b>		
Specification	[(65/0.16OFC+PVC)*2C+Paper+Ripcord+PVC]*1C OD:5.3mm Matt White		
<b>LENGTH</b>	150Meters/Minimum	<b>Qty/Carton</b>	2 Spools
<b>SPOOL SIZE</b>	PK-250*125*160*6 mm	<b>Net Weight</b>	16.2 Kgs
<b>SPOOL STICKER</b>	Yes	<b>Gross Weight</b>	16.9 Kgs
<b>In wall</b>	Yes	<b>Measure</b>	0.93'

## MANUFACTURE STANDARD

Item	Description/Color	Material	Thickness	Outer Diameter	Shape
Conductor	65/0.16	OFC		1.49mm+0.1	
Insulation	Red / Black	PVC	0.28mm+0.1	2.05mm+0.1	Round
Shield	Paper		0.03mm+0.1	4.21mm+0.1	
Assist	Rip Cord	Tetolon Line			
Jacket	Matt White	PVC	0.98mm+0.1	5.3mm+0.1	Round
Printing	Yes.				
Printing text	> > > KASPER • KIC-16 • HIGH PERFORMANCE PURE OFC SPEAKER CABLE > >				
	16AWGX2C CL3 RATING >				
Computer jet printing	00m    00m .....149m   149m				

## Drawing

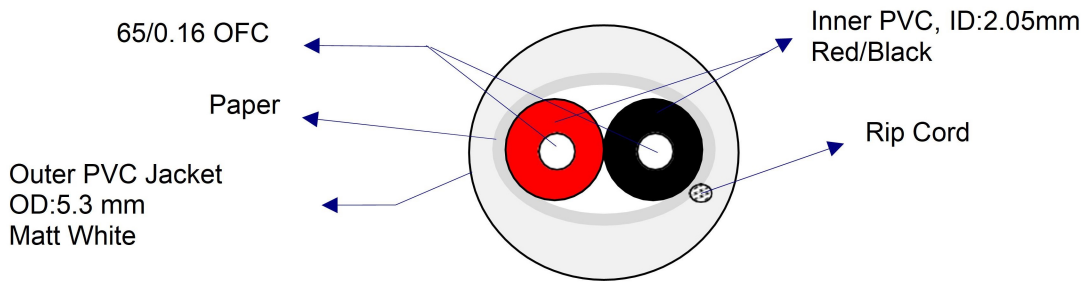

## CHARACTERISTICS

Test Report:

**\*Conductor Resistance**

0.0216 Ω/M

**\*Capacitance**

107.89 PF/M

**\*Inductance**

1.2024 μH/M

