


Cable Specification

| KASPER CABLE | | SPECIFICATION | |
|----------------------|---|---------------------|----------|
| Cable name | KIC-14 | | |
| Model No. | KIC-14 | | |
| Specification | [(103/0.16OFC+PVC)*2C+Paper+Ripcord+PVC]*1C OD:7.5mm Matt White | | |
| LENGTH | 150Meters/Minimum | Qty/Carton | 1 Spool |
| SPOOL SIZE | PK-300*150*200*6 mm | Net Weight | 14.3 Kgs |
| SPOOL STICKER | Yes | Gross Weight | 14.8 Kgs |
| In wall | No | Measure | 0.80' |

MANUFACTURE STANDARD

| Item | Description/Color | Material | Thickness | Outer Diameter | Shape |
|-----------------------|---|--------------|------------|----------------|-------|
| Conductor | 103/0.16 | OFC | | 1.87mm+0.1 | |
| Insulation | Red / Black | PVC | 0.41mm+0.1 | 2.70mm+0.1 | Round |
| Shield | Paper | | 0.03mm+0.1 | 5.51mm+0.1 | |
| Assist | Rip Cord | Tetolon Line | | | |
| Jacket | Matt White | PVC | 1.0mm+0.1 | 7.5mm+0.1 | Round |
| Printing | Yes. | | | | |
| Printing text | >>> KASPER • KIC-14 • HIGH PERFORMANCE PURE OFC SPEAKER CABLE | | | | |
| | 14AWGX2C CL3 RATING >>> | | | | |
| Computer jet printing | 00m 00m.....149m 149m | | | | |

Drawing

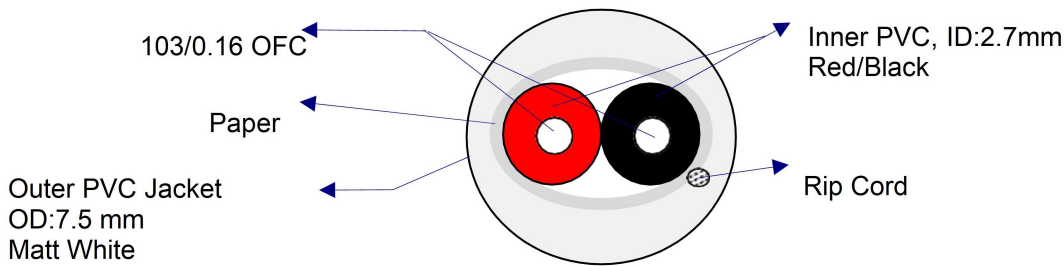

CHARACTERISTICS

Test Report:

***Conductor Resistance**

0.009276 Ω/M

***Capacitance**

116.02 PF/M

***Inductance**

0.9773 μH/M

Cable Picture

